


Only 02-06 Poles
have this stick point

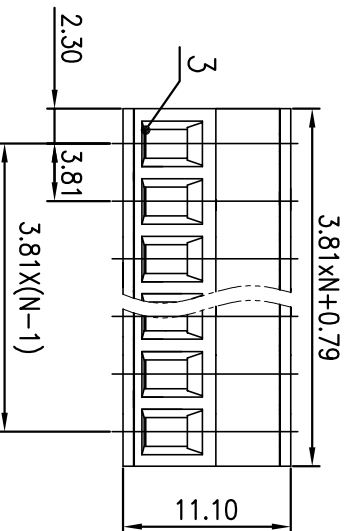

| | | | |
|---|--------------|--------------|---------------|
| 5 | Clamp | Copper Alloy | Sn Plated |
| 4 | Screw | Steel | M2/Zn Plated |
| 3 | Cage | Copper Alloy | M2/Ni Plated |
| 2 | Cover | PA66 | UL94V-0 |
| 1 | Housing | PA66 | UL94V-0 |
| ITEM | NAME OF PART | MATERIAL | NOTES |
| UL 标准 / UL Standard: | | B | C D |
| 额定电压/电流 / Rated Voltage(V)/Current(A) | | 300/8 | / 300/8 |
| EC 标准 / EC Standard: | | | |
| 过压类别 / Overvoltage Category / 污染等级 / Pollution Degree | | | II/2 |
| 额定电压/电流 / Rated Voltage(V)/Current(A) | | | 250/7 |
| 额定冲击电压 (KV) / Rate Impulse Voltage (KV) | | | 2.5 |
| 螺栓扭矩 / Torque Tightening (N·m/Lb.in) | | | M2: 0.2/1.77 |
| 导线范围 (硬线和软线) / Wire Range (rigid and flexible) (mm ² /AWG) | | | 0.5~1.5/28~16 |
| 剥线长度 / Stripping length (mm) | | | 3.81 |
| 使用温度范围 / Operating temperature (°C) | | | -40~+105 |
| 符合RoHS环保要求 / Conform to RoHS | | | Yes |

SURFACE:

宁波三安电子科技有限公司
Sanan Electrical Technology Co., Ltd

NAME: 15ESAK-3.81-XXP-1Y-00A(H)

MATERIAL: _____
MAT NO.: _____
STATUS: _____
APPD: _____
CHKD: _____
DRT: _____

DRAWING NO.: _____
TYPE: _____
SCALE: _____
REV: _____
SHEET: 1/1

| | | | | | | | | | | | | | | |
|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 公差 (General tolerances) (mm) | 0 | >3 | >6 | >10 | >18 | >30 | >50 | >80 | >120 | >180 | >250 | >315 | >400 | >500 |
| | ±0.12 | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.57 | ±0.80 | ±0.93 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50 |
| | ±0.10 | ±0.15 | ±0.20 | ±0.25 | ±0.30 | ±0.40 | ±0.50 | ±0.60 | ±0.70 | ±0.80 | ±1.00 | ±1.20 | ±1.50 | ±2.00 |

0.1/10
±Z